



# WAHL CLIPPER CORP.

STERLING, ILLINOIS

TITLE: Bravura		NO. 41870-0430A,-0430B,-2001		
NO.	REVISIONS	BY	DATE	APPROVED

DRAWN DJS	DATE	WAHL ENGINEERING APPROVAL	DATE
DRAFT 1	DATE	Wahl Quality Approval	DATE
SHEET 1 Of 3	DATE	Wahl Service Center Approval	DATE

ITEM NO.	DESCRIPTION
1	41870-7411 MSC Top/Bottom Housing #6000
2	41870-7110 MSC Motor
3	41870-7460 MSC PCB w/ Batteries #6000
4	41881-7290 MSC Trnsformer Brvra/Chrmd/MARco
5	41870-7470 MSC Charging Stand - Complete #6000
6	46110-0710 MSC Housing Screw
7	41854-7968 MSC Cutter Bld Arco
8	41854-7143 MSC Rplcmnt Bld Pltfm w/spring 5/1
9	41854-7853 MSC Rplcmnt lever 5/1 blade

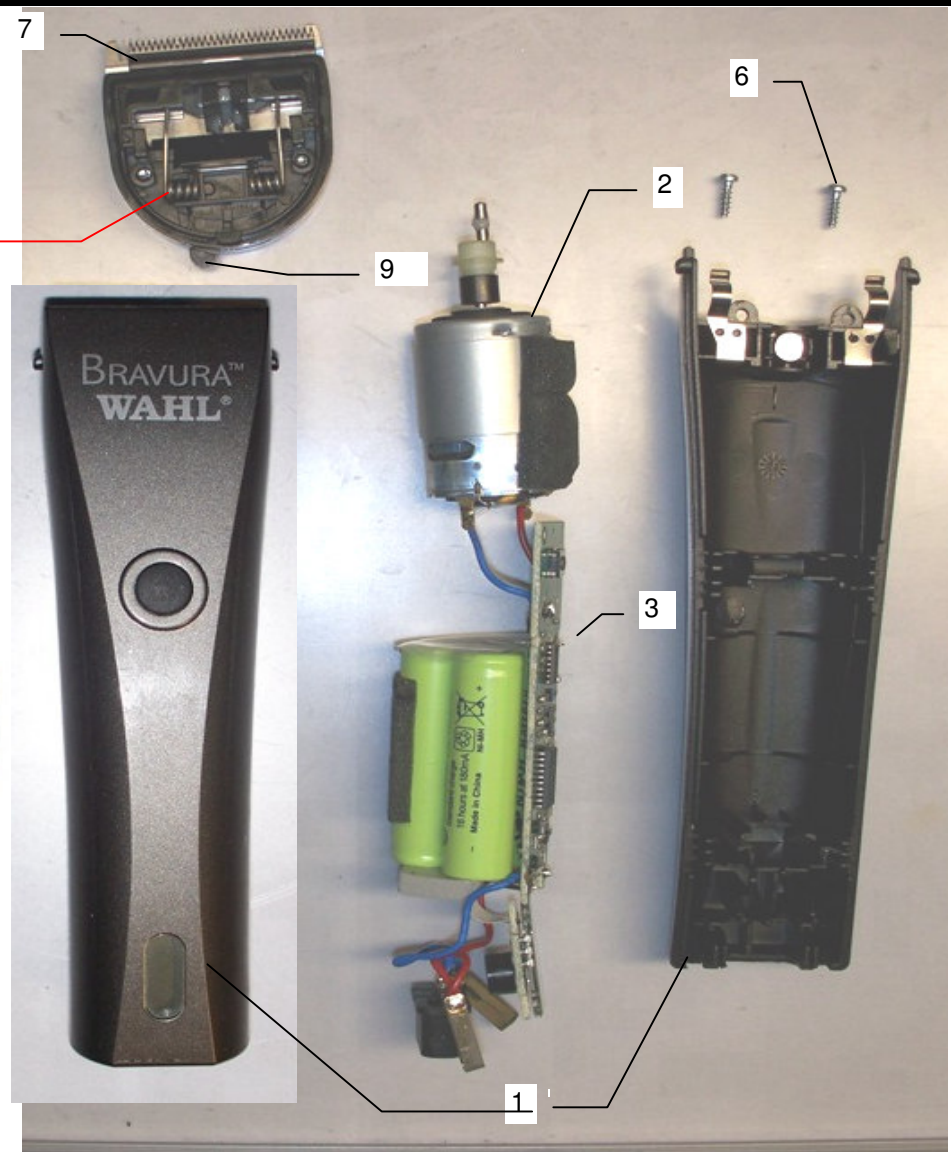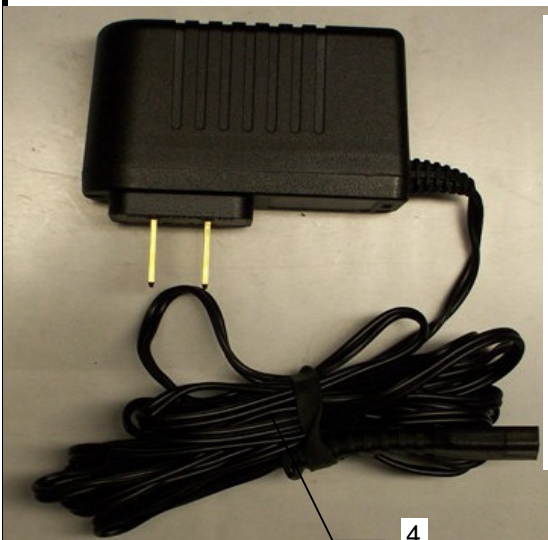

## Specifications

- 1 Test Voltage..... 120 Volt / 60Hz
- 2 Run Time..... 80 Minutes
- 3 Charge Current..... 1.5 Amp
- 4 Charge Time..... Approximately 1.5 Hours
- 5 Battery Type..... 3 1.2 Volt 1000 mA AA Ni Cad Batterys
- 6 Blade Speed..... 5000 RPM
- 7 Cutting..... Must cut Wahl certified media
- 8 Cutting System..... Comb: High grade steel Per Wahl Bill Of Material
- 9 Cutter: High grade steel Per Wahl Bill Of Material
- 10 Cord..... US
- 11 Drive..... 3.6 Volt DC Motor
- 12 Switch Function..... Push Button ON/OFF
- 13 Noise Level..... 63 db Max
- 14 Housing material..... Base: Per Wahl Bill of Material  
Lid: Per Wahl Bill Of Material
- 15 Clipper Approvals..... CE
- 16 Charger Approvals..... CSA

**Appearance**

1. No rust on any exposed metal surfaces like: blades or screws.
2. All visible surfaces, logo must be free of pits, chips, cracks, scratches, sink marks, flash, color deviations, and imperfections.
3. Must be free of dirt, debris, and offensive odor: Trimmer, packaging and all accessories.
4. Excess oil should be wiped off of the trimmer.
5. Logo and artwork to be legible.
6. Cord wire tie should be secured around cord and not fall off or allow cord hank to fall apart.

**Construction**

1. All screws must be tight and not stripped.
2. Clipper to have the following approvals:  
CE
3. Charger to have the following approvals:  
CSA
4. Drop test: Drop unit from 3ft. Onto hardwood surface in 3 different orientations. There must be no exposed live parts.

**Quality Assurance**

1. After being approved, no further changes in material, packaging, design or performance may be made without written permission from WAHL CLIPPER CORPORATION.